



MS Pipette



ACCURATE & PRECISE
SMOOTH PIPETTING

Made in France

MS major science
Innovative Life Sciences Tools

www.majorsci.com
info@majorsci.com

Features:

- Light weight
- Soft spring system for extremely low pipetting forces
- Controlled volume setting to prevent accidental volume changes
- Large volume display
- Contoured shape: fits either small or large hands
- Large pushbutton, rounded and freely rotating
- Finger hook: takes the weight, for a more relaxed grip
- UV resistance even prolonged exposure
- Fully autoclavable (120°C/0.1MPa/20 min)
- A unique serial number



- 3-position tip ejector button (left/right handed users)
- Easy on site calibration (calibration key included)
- High accuracy and precision

Precise volume adjustment & light pipetting forces



MS pipette while providing customers with the “Best Value” combination of quality, features, service and price.

Best Accuracy & Precision


By ISO calibration and certification, MS pipette offer accurate & precise results for your research.

Applicable to universal tip

MS pipette has compatibility with a majority of brands of tips on the market.

Comfort use experience,

Your comfort through perfect fit, lightweight & ergonomic for use MS pipette, and very easy for single-hand operation.

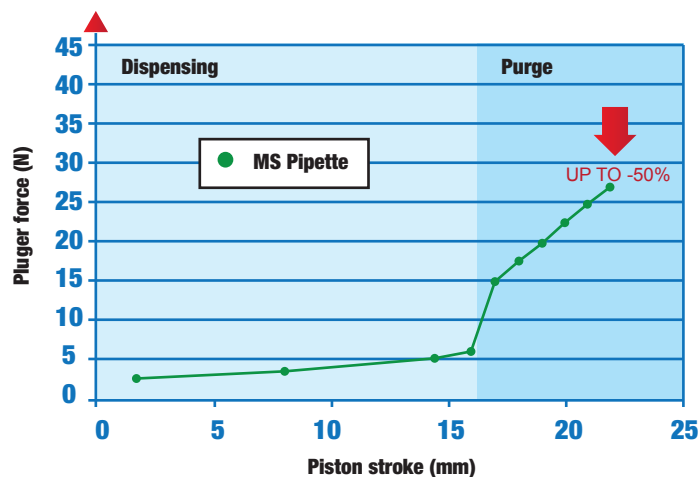

Conception of new seals and lighter springs and use of high quality lubricant:

- Reduce pipetting and purge forces by 50%
- Have an easy glide of the piston
- Maintain an adequate ratio (~1/3) between pipetting forces and purge forces to feel confident in results
- Maintain quality and robustness of our pipetting system.



To each it's own:

MS Pipette

SINGLE CHANNEL

is available in 8 models and covers the volume range from 0.2 μ L to 10 mL



MS Pipette

MULTI CHANNEL

is available in 8 models and covers the volume range from 0.5 μ L to 300 μ L.



Getting more for less

MS pipette is a reliable instrument that has can used and trusted for many years:

Based on the latest innovation in terms of ergonomics and comfort.

Main body design for easy operation by right - hand or left - hand.

New piston mechanism design.

Low maintenance frequency.

Easy to Maintenance by customers.

Characteristic of UV resistance and fully autoclavable can prevent contamination.

Using new materials to extend the life span and chemical resistance.

Original accessory parts will always be available through Major Science service centers.

Ordering information:



Cat. No	Description
MSP-2	MS pipette, variable volume 0.2~2 μ l
MSP-10	MS pipette, variable volume 1~10 μ l
MSP-20	MS pipette, variable volume 2~20 μ l
MSP-100	MS pipette, variable volume 10~100 μ l
MSP-200	MS pipette, variable volume 20~200 μ l
MSP-1000	MS pipette, variable volume 100~1000 μ l
MSP-5000	MS pipette, variable volume 500~5000 μ l
MSP-10000	MS pipette, variable volume 1000~10000 μ l
MSP-8X10	MS 8-ch pipette, variable volume 0.5~10 μ l
MSP-8X20	MS 8-ch pipette, variable volume 2~20 μ l
MSP-8X200	MS 8-ch pipette, variable volume 20~200 μ l
MSP-8X300	MS 8-ch pipette, variable volume 20~300 μ l
MSP-12X10	MS 12-ch pipette, variable volume 0.5~10 μ l
MSP-12X20	MS 12-ch pipette, variable volume 2~20 μ l
MSP-12X200	MS 12-ch pipette, variable volume 20~200 μ l
MSP-12X300	MS 12-ch pipette, variable volume 20~300 μ l
MSP-ST01	Pipette Rotatable stand
MSP-ST02	Pipette Stand
MSP-ST03	Single pipette Holder

*Technical specification are subject to change.




The solution you can trust

Single channel models

Cat No.	Volume (μL)	SPECIFICATIONS				ISO 8655			
		Systematic error		Random error		Systematic error		Random error	
		(μL)	(%)	(μL)	(%)	(μL)	(%)	(μL)	(%)
MSP-2	0.2	±0.026	±13.2%	≤0.013	≤6.6%	±0.080	±40.0%	≤0.040	≤20.0%
	2	±0.033	±1.7%	≤0.015	≤0.8%	±0.080	±4.0%	≤0.040	≤2.0%
MSP-10	1	±0.028	±2.8%	≤0.013	≤1.3%	±0.120	±12.0%	≤0.080	≤8.0%
	10	±0.110	±1.1%	≤0.044	≤0.4%	±0.120	±1.2%	≤0.080	≤0.8%
MSP-20	2	±0.11	±5.5%	≤0.033	≤1.7%	±0.20	±10.0%	≤0.100	≤5.0%
	20	±0.20	±1.0%	≤0.066	≤0.3%	±0.20	±1.0%	≤0.100	≤0.5%
MSP-100	10	±0.39	±3.9%	≤0.11	≤1.1%	±0.80	±8.0%	≤0.030	≤3.0%
	100	±0.80	±0.8%	≤0.17	≤0.2%	±0.80	±0.8%	≤0.030	≤0.3%
MSP-200	20	±0.55	±2.8%	≤0.22	≤1.1%	±1.60	±8.0%	≤0.60	≤3.0%
	200	±1.60	±0.8%	≤0.33	≤0.2%	±1.60	±0.8%	≤0.60	≤0.3%
MSP-1000	100	±3.3	±3.3%	≤0.7	≤0.7%	±8.0	±8.0%	≤3.0	≤3.0%
	1000	±0.8	±0.8%	≤1.7	≤0.2%	±8.0	±0.8%	≤3.0	≤0.3%
MSP-5000	500	±13	±2.6%	≤3.3	≤0.7%	±40	±8.0%	≤15	≤3.0%
	5000	±33	±0.7%	≤8.8	≤0.2%	±40	±0.8%	≤15	≤0.3%
MSP-10000	1000	±33	±3.3%	≤6.6	≤0.7%	±60	±6.0%	≤30	≤3.0%
	10000	±60	±0.6%	≤17.6	≤0.2%	±60	±0.6%	≤30	≤0.3%

Multichannel models

Cat No.	Volume (μL)	SPECIFICATIONS				ISO 8655			
		Systematic error		Random error		Systematic error		Random error	
		(μL)	(%)	(μL)	(%)	(μL)	(%)	(μL)	(%)
MSP-8X10	0.5	±0.09	±17.6%	≤0.04	≤8.8%	±0.24	±48.0%	≤0.16	≤32.0%
MSP-8X20	2	±0.11	±5.5%	≤0.09	≤4.4%	±0.40	±20.0%	≤0.20	≤10.0%
MSP-8X200	20	±0.6	±2.8%	≤0.28	≤1.4%	±3.2	±16.0%	≤1.20	≤6.0%
MSP-8X300	20	±1.1	±3.7%	≤0.39	≤1.3%	±8.0	±26.7%	≤3.00	≤10.0%
MSP-12X10	10	±0.22	±2.2%	≤0.11	≤1.1%	±0.24	±2.4%	≤0.16	≤1.6%
MSP-12X20	20	±0.40	±2.0%	≤0.17	≤0.8%	±0.40	±2.0%	≤0.20	≤1.0%
MSP-12X200	200	±2.2	±1.1%	≤0.55	≤0.3%	±3.2	±1.6%	≤1.20	≤0.6%
MSP-12X300	300	±3.3	±1.1%	≤1.10	≤0.4%	±8.0	±2.7%	≤3.00	≤1.0%



US Office

19959 Sea Gull Way
Saratoga, CA 95070
U.S.A.
T/ +1-408-366-9866
F/ +1-408-446-1107

Taiwan Office

No. 37, Wuquan 5th Road,
Wugu Dist., New Taipei City 24888
Taiwan
T/ +886-2-2298-1055
F/ +886-2-2299-7871

Shanghai Office

Room612, international business exhibition center ,
9300 Hunan Road , Pudong , Shanghai , China
National toll-free No.:400-823-9177
T/ +86-21-50795277
F/ +86-21-50795277

India Office

No.12-13-104, St. No.3, Lane No.1,
Tarnaka, Secunderabad - 500017
Telengana, India
T/ +91-40-27001515
F/ +91-40-27001515